

Refilling instructions for PGI-5 and CLI-8 cartridges

1. Remove label to expose fill port plug.
2. Attach the orange exit port cover (See figure 2) to the cartridge with a rubber band.
3. You must now remove the fill port plug. This can be done in one of two ways: Use a 1/16" drill bit to drill a hole through the plug and use a small screw to remove it OR Push in the plug using a small metal rod or drill bit (NOTE pushing in the plug ball will fracture the fill port bottom opening).
4. FOR CLI-8 cartridges: Using a 5 cc syringe add 5 cc of ink to your cartridge through the fill hole. Repeat this step until 10-12 cc of ink has been added. For PGI-5 cartridges continue adding ink until 22-26 cc of ink has been added.
5. SEALING THE FILL PORT: Depending on the condition of the fill port after the removal of the original plug ball, you can either use the black Easy-Plugs included in your U-INK™ refill kit to plug the fill port or you can use A bead of HOT GLUE to seal the fill port if the plug is unable to seal the hole due to damage occurring during plug removal.
6. Once the fill port is sealed, the cartridge can be used normally.
7. YOUR SMART CHIP CAN NOT BE RESET. When you install the cartridge in your printer you will receive warning messages about your chip. Simply OKAY each message when they occur. Once three messages have been okayed, your ink status monitor will be disabled until a cartridge with a FRESH unused chip has been installed. You will simply have to monitor your ink levels manually. WeInk, LLC is working on a 3rd party cartridge/chip solution for release around August 2006

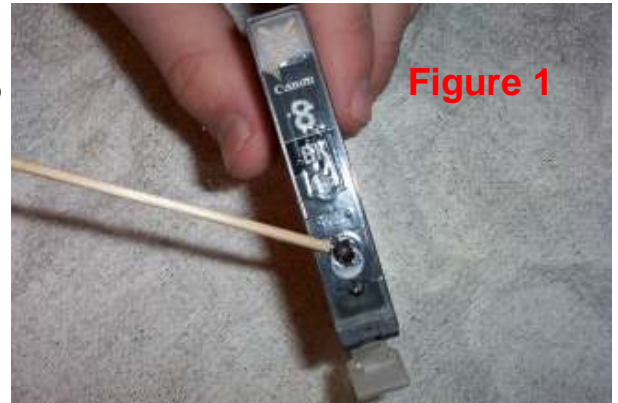


Figure 1



Figure 2

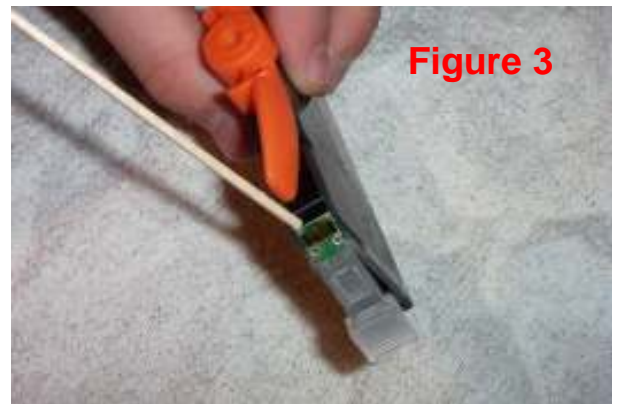


Figure 3